

QuadCore

The QuadCore is a 2,048 DMX channels lighting controller for permanent installations. The device is completely solid-state, with no moving parts; it is a secure and low-maintenance installation control solution that has only a minimal power consumption.


The onboard flash memory allows for storing DMX shows. Playback can be fully automated and triggered by various IP based protocols or internal scheduler. All operating and programming is done through its dynamic web interface.

The QuadCore includes a 4-universe licence of the CueluxPro Lighting control software.



SPECIFICATIONS

- Ethernet port
- Programming via web-interface
- 4 x DMX512-A (ANSI E1.11) port (Opto-isolated, bi-directional)
- Real-Time Clock with battery backup
- Art-Net, sACN, KiNet
- HTTP, TCP, UDP & OSC
- Protocol for synchronising multiple cores.
- 9-12V DC 500mA (PSU included)
- Power over Ethernet (class I)
- Desktop or DIN Rail mounted (optional adapter)
- Kensington lock
- Operating temperature -20°C to +50°C (-4°F to 122°F)
- Bundled with CueluxPro, vManager and Kiosc software
- Compliance: CE, ROHS, UKCA, FCC, EAC, UL62368-1, CSA C22.2 62368-1:19

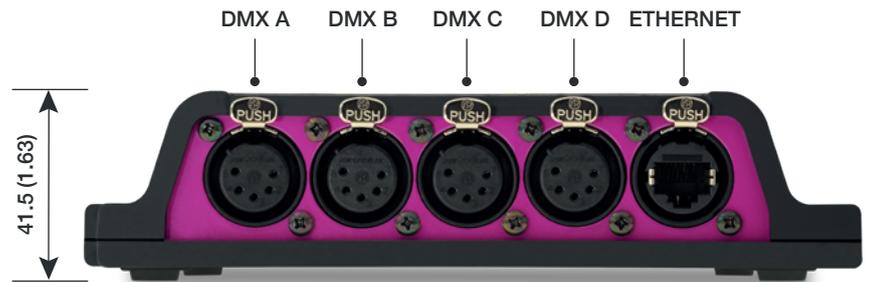

PINOUT

- 1 \perp
- 2 -
- 3 +
- 4 NC
- 5 NC

